

# Frame plug EJOT SDF-S-10HX300-V

SORMAT CODE 8510300420



- Approved for all common building materials.
- It is advisable to use SDF-KB for fixing metal structures and SDF-S plugs for fixing wooden structures.
- Reliable installation in problematic building material due to optimised expansion part.
- Secure hold due to radial expansion.
- Cr VI-free coating of the screw.
- Double safety lock against torsion for secure installation.
- ZP for dry indoor and temporary outdoor use.

## PRODUCT OVERVIEW

|                    |                                |
|--------------------|--------------------------------|
| <b>Other codes</b> | /                              |
| <b>Material</b>    | Polyamide / Steel, zinc plated |
| <b>Packages</b>    | box (bag): 50                  |
| <b>Weight</b>      | 99.1 kg / 1000                 |
| <b>GTIN-13</b>     | 4061245019659                  |

## APPLICATIONS

- Facade substructures
- Squared timbers
- Angle irons
- Windows frames
- Door frames
- Thick fixtures
- Cabinets and wardrobes

## BASE MATERIALS

### APPROVED FOR

- Aerated concrete block
- Cracked concrete
- Non-cracked concrete
- Perforated clay brick
- Perforated sand-lime brick
- Solid clay brick
- Solid sand-lime brick

### ALSO SUITABLE FOR

- Hollow light expanded clay aggregate block
- Natural stone
- Solid light expanded clay aggregate block

## APPROVALS / CERTIFICATES



ETA-10/0305 + DoPs




Fire resistance (ETA-10/0305)

## Technical data

### INSTALLATION DETAILS

### INSTALLATION DETAILS

|                                      |     |                                             |      |
|--------------------------------------|-----|---------------------------------------------|------|
| Size                                 | 10  | Hole in fixture ( $D_f$ )                   | 10,5 |
| Length (L)                           | 300 | Drill hole diameter ( $d_0$ ) $\varnothing$ | 10   |
| Drive                                | T40 | Minimum drill hole depth                    | 80   |
| Max. fixture thickness ( $T_{fix}$ ) | 230 | Drill hole depth ( $h_1$ )                  | 80   |
|                                      |     | Nominal setting depth ( $H_{nom}$ )         | 70   |

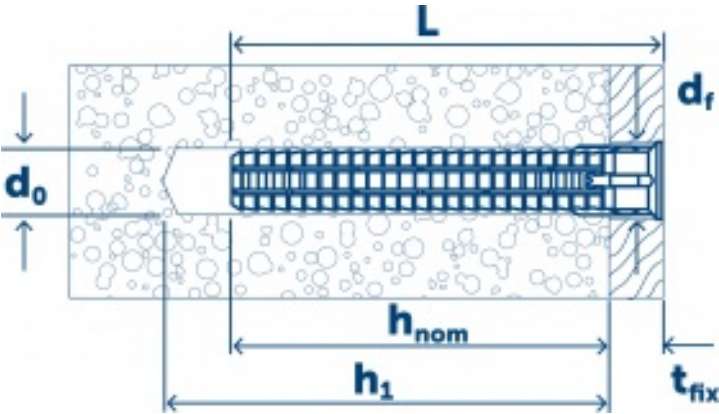

## Performance data

| Base material <span>All</span>                                         | Load type        | Embedment depth (h <sub>nom</sub> ) | Load direction                                                                        | Load value |
|------------------------------------------------------------------------|------------------|-------------------------------------|---------------------------------------------------------------------------------------|------------|
| Cracked concrete C12/15                                                | N <sub>Rec</sub> | 70 mm                               |    | 1.8 kN     |
| Cracked concrete C12/15                                                | V <sub>Rec</sub> | 70 mm                               |    | 5.3 kN     |
| Non-cracked concrete C12/15                                            | N <sub>Rec</sub> | 70 mm                               |    | 1.8 kN     |
| Non-cracked concrete C12/15                                            | V <sub>Rec</sub> | 70 mm                               |    | 5.3 kN     |
| Solid clay brick fb ≥ 20,5 N/mm <sup>2</sup>                           | N <sub>Rec</sub> | 70 mm                               |    | 1.1 kN     |
| Solid clay brick fb ≥ 20,5 N/mm <sup>2</sup>                           | V <sub>Rec</sub> | 70 mm                               |    | 1.1 kN     |
| Solid sand-lime brick fb ≥ 20 N/mm <sup>2</sup>                        | N <sub>Rec</sub> | 70 mm                               |    | 1.3 kN     |
| Solid sand-lime brick fb ≥ 20 N/mm <sup>2</sup>                        | V <sub>Rec</sub> | 70 mm                               |    | 1.3 kN     |
| Hollow light expanded clay aggregate fb ≥ 2,7 MN/m <sup>2</sup>        | N <sub>Rec</sub> | 70 mm                               |    | 0.3 kN     |
| Solid light expanded clay aggregate fb ≥ 3 MN/m <sup>2</sup>           | N <sub>Rec</sub> | 70 mm                               |    | 0.4 kN     |
| Light expanded clay aggregate with insulation fb ≥ 4 MN/m <sup>2</sup> | N <sub>Rec</sub> | 70 mm                               |  | 0.55 kN    |
| Aerated concrete AAC 2,5                                               | N <sub>Rec</sub> | 70 mm                               |  | 0.4 kN     |
| Aerated concrete AAC 4,0                                               | N <sub>Rec</sub> | 70 mm                               |  | 0.55 kN    |
| Hollow sand-lime brick fb ≥ 20 N/mm <sup>2</sup>                       | N <sub>Rec</sub> | 70 mm                               |  | 1.00 kN    |

## Installation

