

Through bolt S-KA+ 8/23/10 ZP

SORMAT CODE 9640001310



Improved premium-quality through bolts for fixing in non-cracked and cracked concrete

- Torque-controlled expansion anchors for pre-, push-through and distance installations.
- When torque is applied the expansion clip expands developing frictional grip with the drill hole walls.
- Anchor diameter and max. fixture thicknesses marked on the body. Anchor length letter code marked on the bolt head.
- M8, M10 and M12 have two different anchorage depths.
- The use of S-KA setting tool makes serial installation safer and quicker.
- Seismic performance category C1/C2 ($h_{ef, std}$).
- ZP for dry indoor use.

PRODUCT OVERVIEW

Other codes	SNRO 1324067 / LVI 3253663
Material	Steel, zinc plated
Packages	box (bag): 50 / outer carton: 250 / pallet: 14000
Weight	29.7 kg / 1000
GTIN-13	6416031013102

APPLICATIONS

- Steel structures
- Column base plates
- Seatings
- Barriers
- Cable racks
- Handrails
- Ladders
- Façade systems

BASE MATERIALS

APPROVED FOR

- Cracked concrete
- Non-cracked concrete

ALSO SUITABLE FOR

- Natural stone

APPROVALS / CERTIFICATES



ETA-16/0934 + DoPs



Fire resistance (ETA-16/0934)



0809-CPR-1252




Seismic resistance (ETA-16/0934_M8)

Technical data

INSTALLATION DETAILS

Size	M8
Length (L)	75
Thread (f)	35
Width across flats (SW)	13
Max. fixture thickness (T _{fix})	23/10

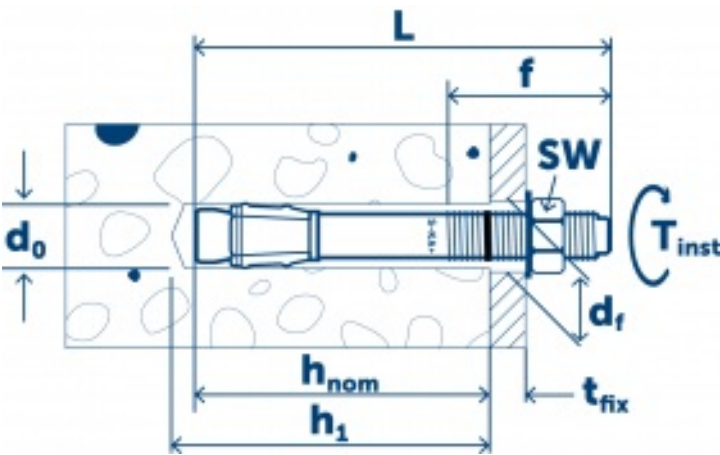

INSTALLATION DETAILS

Hole in fixture (D_f)	9
Drill hole diameter (d_0) $\varnothing$	8
Minimum drill hole depth	47/60
Drill hole depth (h_1)	47/60
Nominal setting depth (H_{nom})	40/53
Effective setting depth (H_{ef})	35/48
Installation torque (T_{inst})	15

Performance data

Base material	Load type	Embedment depth (h_{nom})	Load direction	Load value
All				
Non-cracked concrete C20/25	N_{Rec}	40 mm		3.8 kN
Non-cracked concrete C20/25	V_{Rec}	40 mm		7.2 kN
Non-cracked concrete C20/25	N_{Rec}	53 mm		5.2 kN
Non-cracked concrete C20/25	V_{Rec}	53 mm		7.2 kN
Cracked concrete C20/25	N_{Rec}	40 mm		2.4 kN
Cracked concrete C20/25	V_{Rec}	40 mm		7.2 kN
Cracked concrete C20/25	N_{Rec}	53 mm		4.0 kN
Cracked concrete C20/25	V_{Rec}	53 mm		7.2 kN

Installation

