

Through bolt S-KAK 10X60 HDG

SORMAT CODE 9640002130



Premium-quality through bolts for fixing in non-cracked and cracked concrete

- Torque-controlled expansion anchors for pre-, push-through and distance installations.
- When torque is applied the expansion clip expands developing frictional grip with the drill hole walls.
- Anchor diameter and max. fixture thickness marked on the body.
- The use of S-KA setting tool makes serial installation safer and quicker.
- HDG for dry and humid indoor use, outdoor inland rural areas only.

APPLICATIONS

- Steel structures
- Column base plates
- Seatings
- Barriers
- Cable racks
- Handrails
- Ladders
- Façade systems

APPROVALS / CERTIFICATES



TC 6236-21

Technical data

INSTALLATION DETAILS

Size	M10
Length (L)	62

PRODUCT OVERVIEW

Other codes	SNRO 1356720 /
Material	Steel, hot dip galvanized
Packages	box (bag): 50 / outer carton: 250 / pallet: 14000
Weight	45.8 kg / 1000

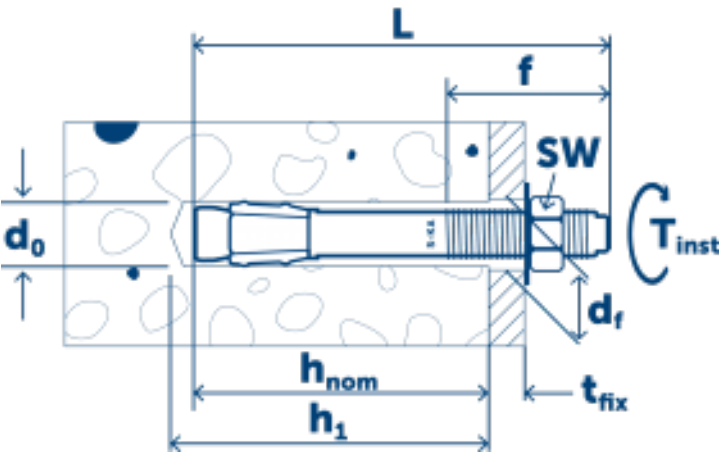
BASE MATERIALS

- ALSO SUITABLE FOR
- Natural stone
 - Non-cracked concrete

INSTALLATION DETAILS



Hole in fixture (D _f)	12
Drill hole diameter (d ₀) Ø	10

Thread (f)
Width across flats (SW)
Max. fixture thickness (T_{fix})



26	Minimum drill hole depth	50
17	Drill hole depth (h_1)	50
3	Nominal setting depth (H_{nom})	40
	Effective setting depth (H_{ef})	30
	Installation torque (T_{inst})	30

Performance data

Base material	Load type	Embedment depth (h_{nom})	Load direction	Load value
Non-cracked concrete C20/25	N_{Rec}	40 mm		3.5 kN
Non-cracked concrete C20/25	V_{Rec}	40 mm		3.8 kN

Installation

