

Through bolt S-KAH 6/15 A4

SORMAT CODE 9640004102



Premium-quality through bolts for fixing in non-cracked and cracked concrete

- Torque-controlled expansion anchors for pre-, push-through and distance installations.
- When torque is applied the expansion clip expands developing frictional grip with the drill hole walls.
- Anchor diameter and max. fixture thickness marked on the body.
- The use of S-KA setting tool makes serial installation safer and quicker.
- A4 for indoor, outdoor and industrial use.

APPLICATIONS

- Steel structures
- Column base plates
- Seatings
- Barriers
- Cable racks
- Handrails
- Ladders
- Façade systems

APPROVALS / CERTIFICATES



ETA-18/0971 + DoPs



0809-CPR-19004629



TC 6236-21



Fire resistance (ETA-18/0971)

Technical data

INSTALLATION DETAILS

PRODUCT OVERVIEW

Other codes	SNRO 1356804 / LVI 3253052
Material	Stainless steel, A4
Packages	box (bag): 100 / outer carton: 500 / pallet: 28000
Weight	15.6 kg / 1000

BASE MATERIALS

APPROVED FOR


- Cracked concrete
- Non-cracked concrete

ALSO SUITABLE FOR

- Natural stone
- Solid clay brick

INSTALLATION DETAILS

Size	M6	Hole in fixture (D_f)	7
Length (L)	65	Drill hole diameter (d_0) \varnothing	6
Thread (f)	20	Minimum drill hole depth	45
Width across flats (SW)	10	Drill hole depth (h_1)	45
Max. fixture thickness (T_{fix})	15	Nominal setting depth (H_{nom})	40
		Effective setting depth (H_{ef})	35
		Installation torque (T_{inst})	8

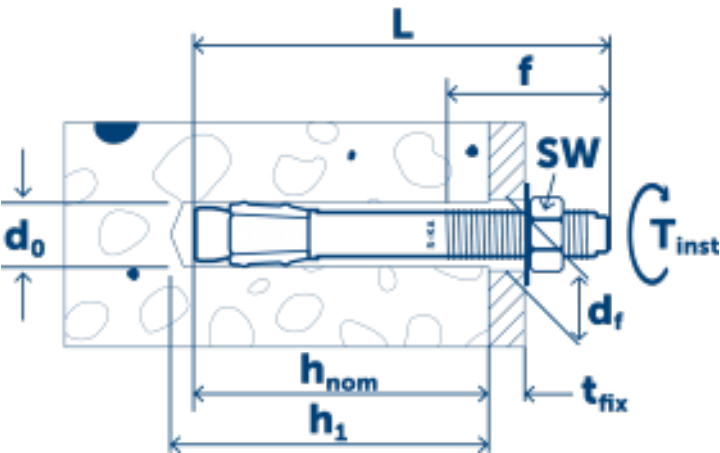

Performance data

Base material	Load type	Embedment depth (h_{nom})	Load direction	Load value
All				
Non-cracked concrete C20/25	N_{Rec}	40 mm		2.4 kN
Non-cracked concrete C20/25	V_{Rec}	40 mm		3.4 kN
Cracked concrete C20/25	N_{Rec}	40 mm		2.4 kN
Cracked concrete C20/25	V_{Rec}	40 mm		3.4 kN

Installation

