

Through bolt S-KAH 8/30 A4

SORMAT CODE 9640005114



Premium-quality through bolts for fixing in non-cracked and cracked concrete

- Torque-controlled expansion anchors for pre-, push-through and distance installations.
- When torque is applied the expansion clip expands developing frictional grip with the drill hole walls.
- Anchor diameter and max. fixture thickness marked on the body.
- The use of S-KA setting tool makes serial installation safer and quicker.
- A4 for indoor, outdoor and industrial use.

APPLICATIONS

- Steel structures
- Column base plates
- Seatings
- Barriers
- Cable racks
- Handrails
- Ladders
- Façade systems

APPROVALS / CERTIFICATES



ETA-08/0173 + DoPs



0809-CPR-1078



Seismic resistance (ETA-08/0173)



TC 6236-21



Fire resistance (ETA-08/0173)

PRODUCT OVERVIEW

Other codes	SNRO 1356814 / LVI 3253058
Material	Stainless steel, A4
Packages	box (bag): 50 / outer carton: 250 / pallet: 14000
Weight	35.0 kg / 1000

BASE MATERIALS

APPROVED FOR

- Cracked concrete
- Non-cracked concrete


ALSO SUITABLE FOR

- Natural stone
- Solid clay brick

Technical data

INSTALLATION DETAILS

- Size
- Length (L)
- Thread (f)
- Width across flats (SW)
- Max. fixture thickness (T_{fix})

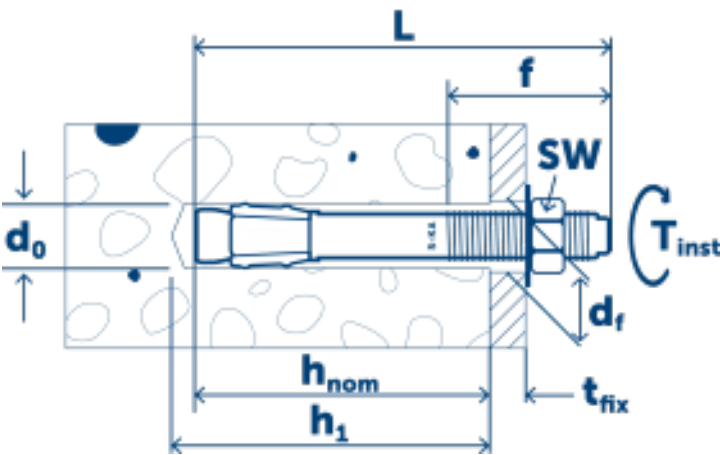

INSTALLATION DETAILS

M8	Hole in fixture (D _f)	9
92	Drill hole diameter (d ₀) ∅	8
52	Minimum drill hole depth	60
13	Drill hole depth (h ₁)	60
30	Nominal setting depth (H _{nom})	50
	Effective setting depth (H _{ef})	45
	Installation torque (T _{inst})	20

Performance data

Base material	Load type	Embedment depth (h_{nom})	Load direction	Load value
All				
Non-cracked concrete C20/25	N_{Rec}	50 mm		3.6 kN
Non-cracked concrete C20/25	V_{Rec}	50 mm		6.3 kN
Cracked concrete C20/25	N_{Rec}	50 mm		2.0 kN
Cracked concrete C20/25	V_{Rec}	50 mm		5.0 kN

Installation

