

Drop in anchor LA+ 8 ZP

SORMAT CODE 9640070052

ETA-approved drop in anchors ideal for suspension systems

- Drop in anchors for pre-installation with an installation tool.
- Internal thread for metric bolts and rods.
- Suitable bolt length is 1-1,5 x the nominal size of the anchor + fixture thickness.
- Shallow drilling depth makes drilling and overhead installation easier.
- Suitable for sprinkler systems.
- ZP for dry indoor and temporary outdoor use.

APPLICATIONS

- Suspension systems
- Pipelines
- Air ducts
- Sprinkler systems
- Cable trays
- Machines
- Consoles
- Ceiling bearers

APPROVALS / CERTIFICATES



ETA-13/0441 + DoPs



1488-CPR-0350/Z



Fire resistance (ETA-13/0441)

PRODUCT OVERVIEW

Other codes	SNRO 1308887 / LVI 3252108
Material	Steel, zinc plated
Packages	box (bag): 100 / outer carton: 1000 / pallet: 56000
Weight	11.3 kg / 1000
GTIN-13	6416031700521
Availability	end of life

BASE MATERIALS

APPROVED FOR

- Cracked concrete
- Non-cracked concrete

ALSO SUITABLE FOR

- Natural stone
- Solid clay brick



ETA-13/0442 + DoPs




1488-CPR-0443/W

Technical data

INSTALLATION DETAILS

Size
Length (L)
Thread (f)

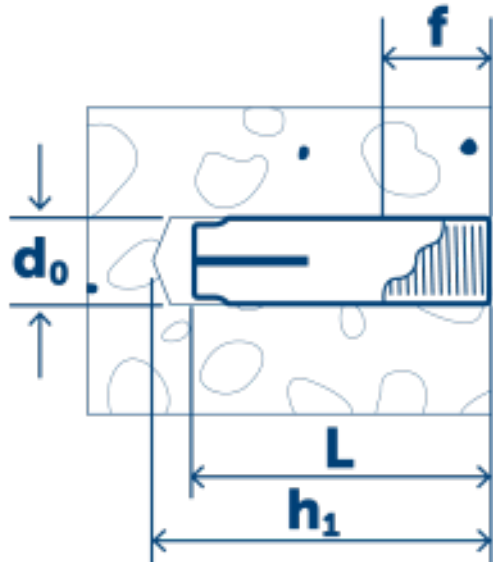

INSTALLATION DETAILS

M8	Hole in fixture (D_f)	≤ 9
30	Drill hole diameter (d_0) \varnothing	10
13	Minimum drill hole depth	32
	Drill hole depth (h_1)	32
	Nominal setting depth (H_{nom})	30
	Effective setting depth (H_{ef})	30
	Installation torque (T_{inst})	max 8

Performance data

Base material	Load type	Load direction	Load value
Non-cracked concrete C20/25	N_{Rec}		3.6 kN
Non-cracked concrete C20/25	V_{Rec}		3.1 kN

Installation

