

Concrete Screw S-CSA HEX 6X60/5/20 SW13 ZP

SORMAT CODE 9640071310

ETA-approved 6/8/10 concrete screw for cracked and non-cracked concrete

- Self-tapping, approved screw anchors for push-through installations.
- Requires a small drill hole diameter. No prescribed tightening torque.
- No expansion forces allowing for small edge distances and spacings.
- Fully removable.
- ZP for dry indoor use.

APPLICATIONS

- Facade scaffoldings
- Temporary fixings
- Seatings
- Shelves
- Cable racks
- Handrails
- Battens

APPROVALS / CERTIFICATES



ETA-16/0945 + DoPs



TC 5905-19



0809-CPR-1238

PRODUCT OVERVIEW

Other codes	SNRO 1310052 / LVI 3255504
Material	Steel, zinc plated
Packages	box (bag): 100 / outer carton: 500 / pallet: 28000
Weight	20.3 kg / 1000

BASE MATERIALS

APPROVED FOR

- Cracked concrete
- Hollow-core slab
- Non-cracked concrete

ALSO SUITABLE FOR

- Solid clay brick
- Solid sand-lime brick



ETA-17/1009 + DoPs



0809-CPR-1202




Fire resistance (ETA-16/0945)



Technical data

INSTALLATION DETAILS

Size
Length (L)
Width across flats (SW)
Drive
Max. fixture thickness (T_{fix})

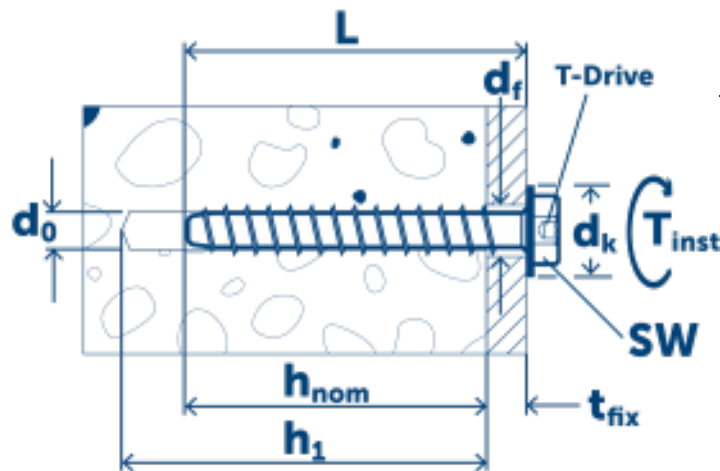

INSTALLATION DETAILS

6	Hole in fixture (D_f)	9
60	Drill hole diameter (d_0) $\varnothing$	6
13	Minimum drill hole depth	65/50
T30	Drill hole depth (h_1)	65/50
5/20	Nominal setting depth (H_{nom})	55/40
	Installation torque (T_{inst})	14

HEAD DETAILS

Head diameter $\varnothing$	16,5
-----------------------------	------

Performance data

Base material All	ETA	Load type	Embedment depth (h_{nom})	Load direction	Load value
Non-cracked concrete C20/25	Yes	N _{Rec}	55 mm		4.5 kN
Non-cracked concrete C20/25	Yes	V _{Rec}	55 mm		5.6 kN
Cracked concrete C20/25	Yes	N _{Rec}	55 mm		2.1 kN
Cracked concrete C20/25	Yes	V _{Rec}	55 mm		4.5 kN
Non-cracked concrete C20/25	Yes	N _{Rec}	40 mm		1.7 kN
Non-cracked concrete C20/25	Yes	V _{Rec}	40 mm		5.4 kN
Cracked concrete C20/25	Yes	N _{Rec}	40 mm		1.7 kN
Cracked concrete C20/25	Yes	V _{Rec}	40 mm		5.4 kN
Hollow-core slab, bottom flange thickness 25 mm	Yes	N _{Rec}	40 mm		1.2 kN
Hollow-core slab, bottom flange thickness 25 mm	Yes	V _{Rec}	40 mm		1.2 kN

Installation

