

Concrete Screw S-CSA P 6X60/5/20 ZP

SORMAT CODE 9640071549



ETA-approved 6 concrete screw for cracked and non-cracked concrete

- Self-tapping, approved screw anchors for push-through installations.
- Requires a small drill hole diameter. No prescribed tightening torque.
- No expansion forces allowing for small edge distances and spacings.
- Fully removable.
- ZP for dry indoor use.

APPLICATIONS

- Facade scaffoldings
- Temporary fixings
- Seatings
- Shelves
- Cable racks
- Handrails
- Battens

APPROVALS / CERTIFICATES



ETA-16/0945 + DoPs



0809-CPR-1202



Fire resistance (ETA-16/0945)



ETA-17/1009 + DoPs



0809-CPR-1238



Fire resistance (ETA-17/1009)

PRODUCT OVERVIEW

Other codes	SNRO 1310837 / LVI 3255544
Material	Steel, zinc plated
Packages	box (bag): 50 / outer carton: 250 / pallet: 14000
Weight	17.8 kg / 1000
GTIN-13	6416031715495

BASE MATERIALS

APPROVED FOR

- Cracked concrete
- Hollow-core slab
- Non-cracked concrete


ALSO SUITABLE FOR

- Solid clay brick
- Solid sand-lime brick

Technical data

INSTALLATION DETAILS

Size
Length (L)
Drive
Max. fixture thickness (T_{fix})

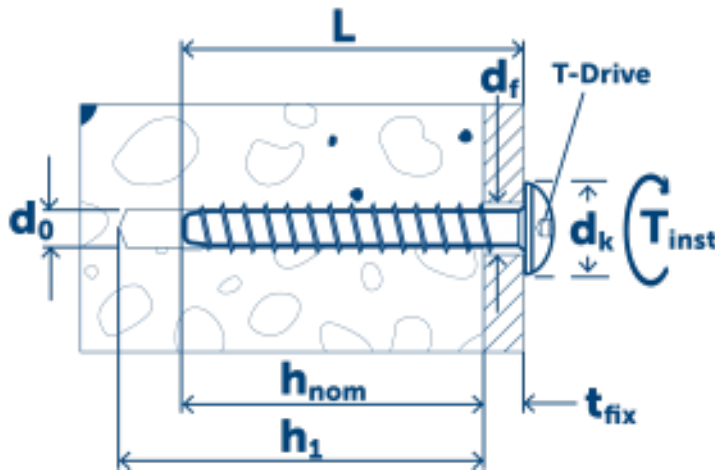

INSTALLATION DETAILS

6	Hole in fixture (D_f)	9
60	Drill hole diameter (d_0) $\varnothing$	6
T30	Minimum drill hole depth	65/50
5/20	Drill hole depth (h_1)	65/50
	Nominal setting depth (H_{nom})	55/40
	Installation torque (T_{inst})	14

HEAD DETAILS

	Head diameter $\varnothing$	14,5
	Head height	5

Performance data

Base material	ETA	Load type	Embedment depth (h _{nom})	Load direction	Load value
All					
Non-cracked concrete C20/25	Yes	N _{Rec}	55 mm		4.5 kN
Non-cracked concrete C20/25	Yes	V _{Rec}	55 mm		5.6 kN
Cracked concrete C20/25	Yes	N _{Rec}	55 mm		2.1 kN
Cracked concrete C20/25	Yes	V _{Rec}	55 mm		4.5 kN
Non-cracked concrete C20/25	Yes	N _{Rec}	40 mm		1.7 kN
Non-cracked concrete C20/25	Yes	V _{Rec}	40 mm		5.4 kN
Cracked concrete C20/25	Yes	N _{Rec}	40 mm		1.7 kN
Cracked concrete C20/25	Yes	V _{Rec}	40 mm		5.4 kN
Hollow-core slab, bottom flange thickness 25 mm	Yes	N _{Rec}	40 mm		1.2 kN
Hollow-core slab, bottom flange thickness 25 mm	Yes	V _{Rec}	40 mm		1.2 kN

Installation

