

Brass anchor MSA 16

SORMAT CODE 9640072216



Quality all-around brass anchors with internal thread

- Internally threaded brass expansion anchor for preinstallation.
- Cross knurling on the body to prevent rotation during installation.
- Internal thread for metric bolts and rods.
- Brass anchors are suitable for indoor and outdoor use.

PRODUCT OVERVIEW


Other codes	/		
Material	Brass		
Packages	box (bag): 25 / outer		
	carton: 250 / pallet: 14000		
Weight	53.7 kg / 1000		

APPLICATIONS

- Air ducts
- Cable trays
- Curtain rails
- Substructures
- Rails
- Protective wall panels
- Safety covers
- Suspended ceilings

Technical data

INSTALLATION DETAILS

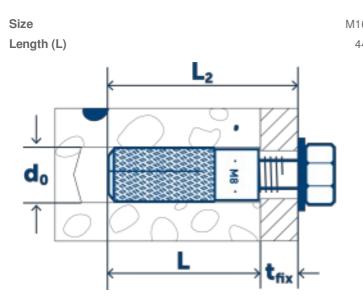

BASE MATERIALS

ALSO SUITABLE FOR

- Hollow-core slab
- Natural stone
- Non-cracked concrete
- Solid clay brick

INSTALLATION DETAILS

6	Drill hole diameter (d ₀) ø	20
4	Nominal setting depth (Hnom)	44

Performance data

Base material	Load type	Embedment depth (h _{nom})	Load direction	Load value
Non-cracked concrete C20/25	N _{Rec}	44 mm	**	4.1 kN
Non-cracked concrete C20/25	V _{Rec}	44 mm	¥.	4.1 kN

Installation

