


Drop in anchor LAH 10 A4

SORMAT CODE 9640074010



Stainless steel drop in anchors for suspension systems

- Drop in anchors for pre-installation with an installation tool.
- Internal thread for metric bolts and rods.
- Suitable bolt length is 1-1,5 x the nominal size of the anchor + fixture thickness.
- Shallow drilling depth makes drilling and overhead installation easier.
- A4 for indoor, outdoor and industrial use.

APPLICATIONS

- Suspension systems
- Pipelines
- Air ducts
- Sprinkler systems
- Cable trays
- Machines
- Consoles
- Ceiling bearers

Technical data

INSTALLATION DETAILS

Size	M10
Length (L)	40
Thread (f)	18

PRODUCT OVERVIEW


Other codes	SNRO 1355930 / LVI 3252136
Material	Stainless steel, A4
Packages	box (bag): 50 / outer carton: 500 / pallet: 28000
Weight	22.1 kg / 1000
GTIN-13	8716247740105
Availability	end of life

BASE MATERIALS



- ALSO SUITABLE FOR
- Natural stone
 - Non-cracked concrete

INSTALLATION DETAILS

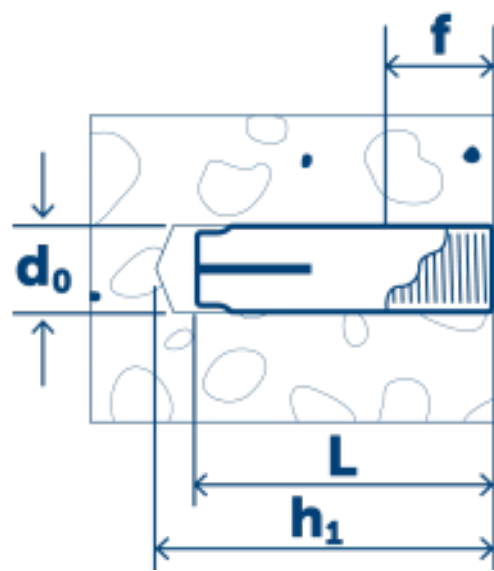Hole in fixture (D_f)	≤ 12
Drill hole diameter (d_0) \varnothing	12
Minimum drill hole depth	42
Drill hole depth (h_1)	42
Nominal setting depth (H_{nom})	40
Effective setting depth (H_{ef})	40
Installation torque (T_{inst})	max 15



Performance data

Base material	Load type	Load direction	Load value
Non-cracked concrete C20/25	N_{Rec}		3.5 kN
Non-cracked concrete C20/25	V_{Rec}		4.4 kN

Installation

