

# Nail plug LYT 5/30 ZP

SORMAT CODE 9640075623



## Time-saving, simple Speedplug for light-duty fixings

- Preassembled with nailscrew, ready-to-install nylon speedplugs for hammer-in -type through fixings.
- This model is ideal for electrical installations, pipe clips etc.
- Nailscrew head with pozidrive slot for removing or adjusting the anchor.
- Plug collars function as plastic insulating washers thus preventing touch-corrosion from taking place.
- ZP for dry indoor and temporary outdoor use.


## APPLICATIONS

- Electrical installations
- Cable ducts
- Cable clamps
- Pipe supports
- Baseboards

## Technical data

### INSTALLATION DETAILS

Size  
Length (L)  
Max. fixture thickness ( $T_{fix}$ )

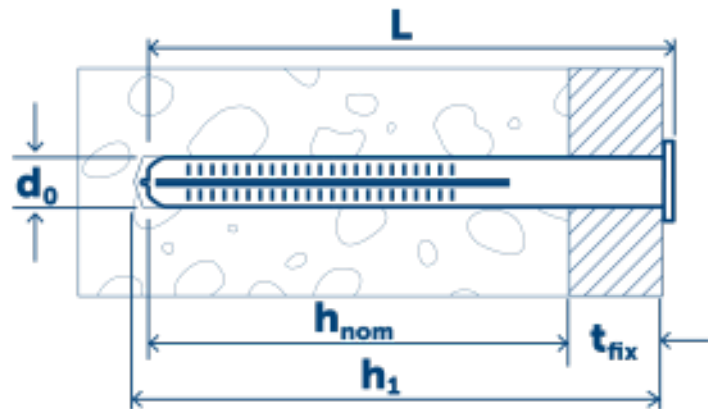

## PRODUCT OVERVIEW

Other codes	SNRO 1350660 /
Material	Polyamide / Steel, zinc plated
Packages	box (bag): 200 / outer carton: 2000 / pallet: 56000
Weight	2.6 kg / 1000

## BASE MATERIALS

### ALSO SUITABLE FOR

- Natural stone
- Non-cracked concrete
- Perforated clay brick
- Solid clay brick

### INSTALLATION DETAILS

5	Hole in fixture ( $D_f$ )	5,5
30	Drill hole diameter ( $d_0$ ) $\varnothing$	5
5	Minimum drill hole depth	40
	Drill hole depth ( $h_1$ )	40
	Nominal setting depth ( $H_{nom}$ )	25
	Effective setting depth ( $H_{ef}$ )	25

# Performance data

Base material	Load type	Embedment depth ( $h_{nom}$ )	Load direction	Load value
All				
Non-cracked concrete C20/25	$N_{Rec}$	25 mm		0.2 kN
Non-cracked concrete C20/25	$V_{Rec}$	25 mm		0.2 kN
Solid clay brick $f_b \geq 20,5 \text{ N/mm}^2$	$N_{Rec}$	25 mm		0.1 kN
Solid clay brick $f_b \geq 20,5 \text{ N/mm}^2$	$V_{Rec}$	25 mm		0.1 kN

## Installation

