

Nail plug LIT 5/35 with black nail

SORMAT CODE 9640075645



For quick fixing of baseboards and covering strips in concrete and masonry

- Ready-to-install nylon plug for hammer-in -type through fixings.
- It is recommended to use a nylon hammer when installing.
- Nailscrew head with pozidrive slot for removing or adjusting the anchor.
- Head of the nailscrew covers the head of the plug which will be invisible to the eye.
- White and brown plugs available. Supplied with preassembled nails in various colours.
- ZP for dry indoor and temporary outdoor use.

APPLICATIONS

- Baseboards
- Covering strips

Technical data

INSTALLATION DETAILS

Length (L)	35	Drill hole diameter (d₀) ∅	5
Max. fixture thickness (T_{fix})	5	Minimum drill hole depth	35
		Drill hole depth (h₁)	35
		Total drilling depth	40
		Nominal setting depth (H_{nom})	30

PRODUCT OVERVIEW


Other codes	SNRO 1308853 /
Material	Polyamide / Steel, zinc plated
Packages	box (bag): 200 / outer carton: 2000 / pallet: 56000
Weight	3.0 kg / 1000

BASE MATERIALS

ALSO SUITABLE FOR

- Natural stone
- Non-cracked concrete
- Perforated clay brick
- Solid clay brick

INSTALLATION DETAILS

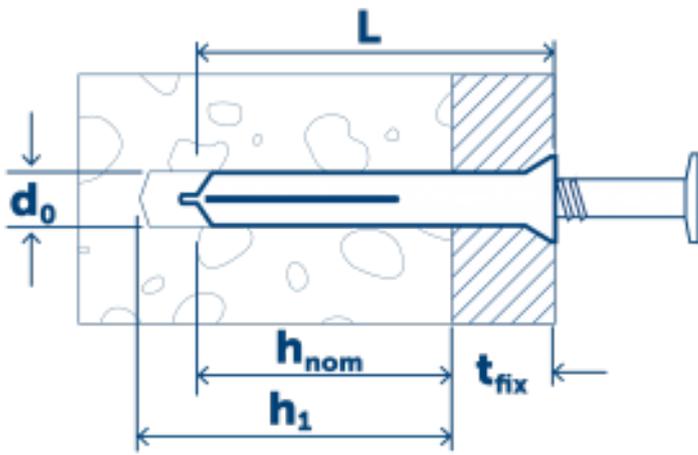

Installation

