

Nail plug LIT 5/45 with white nail

SORMAT CODE 9640075646



For quick fixing of baseboards and covering strips in concrete and masonry

- Ready-to-install nylon plug for hammer-in -type through fixings.
- It is recommended to use a nylon hammer when installing.
- Nailscrew head with pozidrive slot for removing or adjusting the anchor.
- Head of the nailscrew covers the head of the plug which will be invisible to the eye.
- White and brown plugs available. Supplied with preassembled nails in various colours.
- ZP for dry indoor and temporary outdoor use.

APPLICATIONS

- Baseboards
- Covering strips

Technical data

INSTALLATION DETAILS

Length (L)
Max. fixture thickness (T_{fix})

45
15

PRODUCT OVERVIEW


| | |
|-------------|---|
| Other codes | SNRO 1308858 / |
| Material | Polyamide / Steel, zinc plated |
| Packages | box (bag): 200 / outer carton: 2000 / pallet: 48000 |
| Weight | 3.6 kg / 1000 |

BASE MATERIALS

- ALSO SUITABLE FOR
- Natural stone
 - Non-cracked concrete
 - Perforated clay brick
 - Solid clay brick

INSTALLATION DETAILS

| | |
|---|----|
| Drill hole diameter (d ₀) Ø | 5 |
| Minimum drill hole depth | 35 |
| Drill hole depth (h ₁) | 35 |
| Total drilling depth | 50 |
| Nominal setting depth (H _{nom}) | 30 |

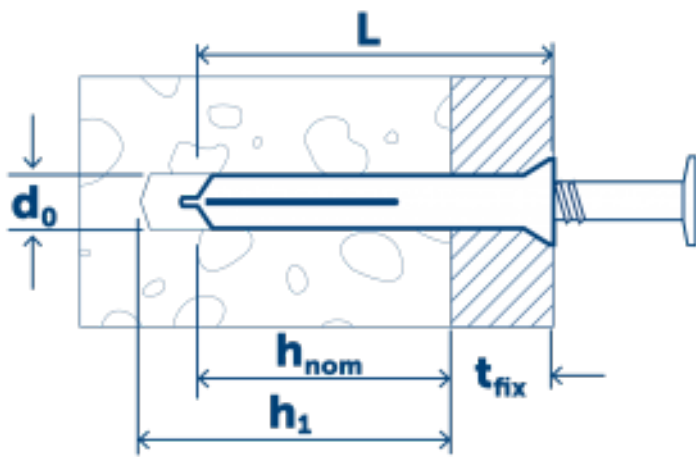

Installation

