

PFG Hookbolt type HBF 8 ZP

SORMAT CODE 9640077331



The original shield anchors with extra expansion for low-quality concrete

- Torque-controlled shield anchors for pre- and distance installations depending on the type.
- 4-way extra wide expansion for great performance also in lower quality base materials found in many old constructions.
- Good tolerance for variation in drill hole size.
- ZP for dry indoor and temporary outdoor use.

PRODUCT OVERVIEW

Other codes	SNRO 1356253 /
Material	Steel, zinc plated
Packages	box (bag): 25 / outer carton: 125 / pallet: 7000
Weight	78.7 kg / 1000
GTIN-13	8716247773318
Availability	end of life

APPLICATIONS

- Steel structures
- Facade scaffolding
- Gates
- Facade systems
- Sun blinds
- Steel structures
- Pipe supports

BASE MATERIALS

- ALSO SUITABLE FOR
- Natural stone
 - Non-cracked concrete
 - Perforated clay brick
 - Solid clay brick

Technical data

INSTALLATION DETAILS


Size	M8
Length (L)	50
Width across flats (SW)	13

INSTALLATION DETAILS


Drill hole diameter (d ₀) Ø	14
Minimum drill hole depth	55
Drill hole depth (h ₁)	55
Nominal setting depth (H _{nom})	50
Installation torque (T _{inst})	25

HEAD DETAILS

Inner hook diameter	10,0
---------------------	------

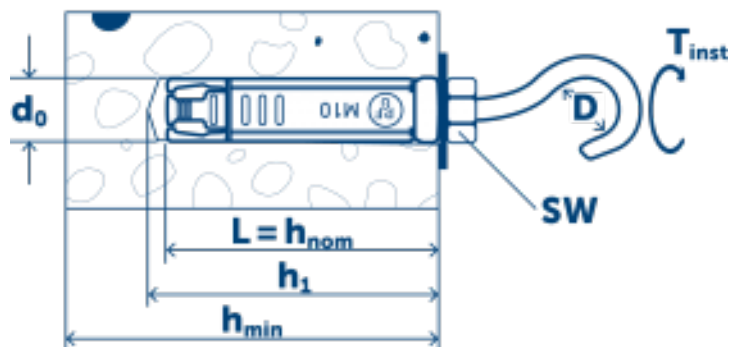

Performance data

Base material	Load type	Embedment depth (h_{nom})	Load direction	Load value
Non-cracked concrete C20/25	N_{Rec}	50 mm		3.6 kN

Installation

