

PFG Eyebolt type EBF 6 ZP

SORMAT CODE 9640077430



The original shield anchors with extra expansion for low-quality concrete

- Torque-controlled shield anchors for pre- and distance installations depending on the type.
- 4-way extra wide expansion for great performance also in lower quality base materials found in many old constructions.
- Good tolerance for variation in drill hole size.
- ZP for dry indoor and temporary outdoor use.

APPLICATIONS

- Steel structures
- Facade scaffolding
- Gates
- Facade systems
- Sun blinds
- Steel structures
- Pipe supports

Technical data

INSTALLATION DETAILS

Size M6
 Length (L) 40
 Width across flats (SW) 10

M6	Drill hole diameter (d_0) \varnothing	10
40	Minimum drill hole depth	45
10	Drill hole depth (h_1)	45
	Nominal setting depth (H_{nom})	40
	Installation torque (T_{inst})	10

HEAD DETAILS

	Inner hole / eye diameter \varnothing	10,0
--	--	------


PRODUCT OVERVIEW

Other codes	SNRO 1356262 /
Material	Steel, zinc plated
Packages	box (bag): 25 / outer carton: 250 / pallet: 14000
Weight	30.7 kg / 1000
GTIN-13	8716247774308
Availability	end of life

BASE MATERIALS

ALSO SUITABLE FOR

- Natural stone
- Non-cracked concrete
- Perforated clay brick
- Solid clay brick

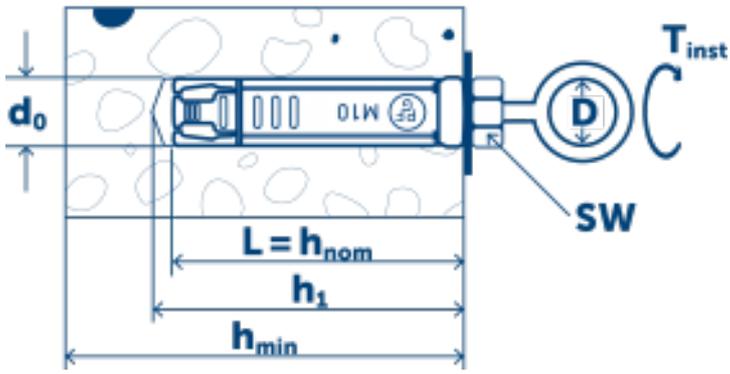

Performance data

Base material	Load type	Embedment depth (h_{nom})	Load direction	Load value
Non-cracked concrete C20/25	N_{Rec}	40 mm		2.0 kN

Installation

