

PFG Eyebolt type EBF 10 ZP

SORMAT CODE 9640077432



The original shield anchors with extra expansion for low-quality concrete

- Torque-controlled shield anchors for pre- and distance installations depending on the type.
- 4-way extra wide expansion for great performance also in lower quality base materials found in many old constructions.
- Good tolerance for variation in drill hole size.
- ZP for dry indoor and temporary outdoor use.

APPLICATIONS

- Steel structures
- Facade scaffolding
- Gates
- Facade systems
- Sun blinds
- Steel structures
- Pipe supports

Technical data

INSTALLATION DETAILS

Size
Length (L)
Width across flats (SW)

M10
60
17

INSTALLATION DETAILS

Drill hole diameter (d ₀) ∅	16
Minimum drill hole depth	65
Drill hole depth (h ₁)	65
Nominal setting depth (H _{nom})	60
Installation torque (T _{inst})	50

HEAD DETAILS


Inner hole / eye diameter ∅	14,5
-----------------------------	------

PRODUCT OVERVIEW

Other codes	SNRO 1356264 /
Material	Steel, zinc plated
Packages	box (bag): 10 / outer carton: 50 / pallet: 2800
Weight	121.3 kg / 1000
GTIN-13	8716247774322
Availability	end of life

BASE MATERIALS

- ALSO SUITABLE FOR
- Natural stone
 - Non-cracked concrete

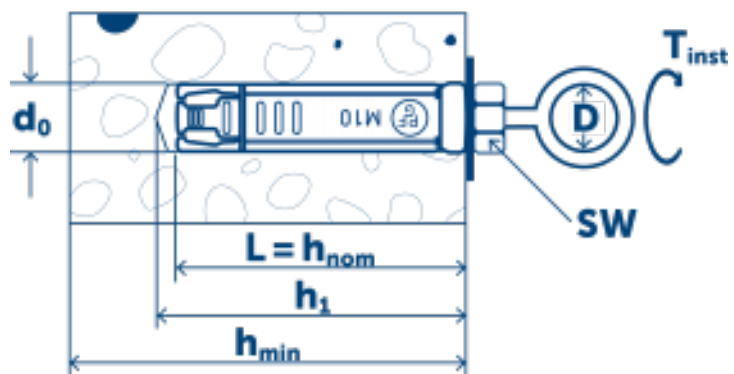

Performance data

Base material	Load type	Embedment depth (h_{nom})	Load direction	Load value
Non-cracked concrete C20/25	N_{Rec}	60 mm		4.8 kN

Installation

