

Drop in anchor LA+ 6 ZP (10 DIY)

SORMAT CODE 9640094310



ETA-approved drop in anchors ideal for suspension systems

- Drop in anchors for pre-installation with an installation tool.
- Internal thread for metric bolts and rods.
- Suitable bolt length is 1-1,5 x the nominal size of the anchor + fixture thickness.
- Shallow drilling depth makes drilling and overhead installation easier.
- Suitable for sprinkler systems.
- ZP for dry indoor and temporary outdoor use.

PRODUCT OVERVIEW

Other codes	SNRO 1308877 /
Material	Steel, zinc plated
Packages	box (bag): 10 / outer carton: 100 / piece: 1
Weight	6.3 kg / 1000
GTIN-13	6416031943102
Availability	end of life

APPLICATIONS

- Suspension systems
- Pipelines
- Air ducts
- Sprinkler systems
- Cable trays
- Machines
- Consoles
- Ceiling bearers

BASE MATERIALS

- APPROVED FOR
- Cracked concrete
 - Non-cracked concrete
- ALSO SUITABLE FOR
- Natural stone
 - Solid clay brick

APPROVALS / CERTIFICATES



ETA-13/0441 + DoPs



1488-CPR-0350/Z


Technical data

INSTALLATION DETAILS

Size	M6
Length (L)	25
Thread (f)	10

INSTALLATION DETAILS

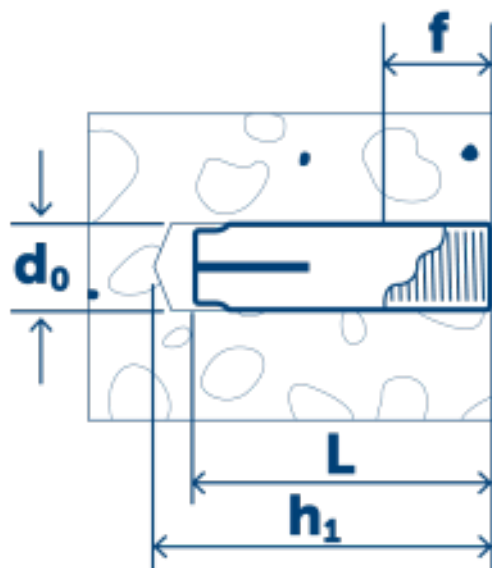

Drill hole diameter (d ₀) ø	8
Minimum drill hole depth	27
Drill hole depth (h ₁)	27



Effective setting depth (H_{ef})

25

Performance data

Base material	Load type	Load direction	Load value
Non-cracked concrete C20/25	N_{Rec}		1.9 kN
Non-cracked concrete C20/25	V_{Rec}		1.7 kN

Installation

