

# Drop in anchor LA+ 8 ZP (5 DIY)

SORMAT CODE 9640094312



## ETA-approved drop in anchors ideal for suspension systems

- Drop in anchors for pre-installation with an installation tool.
- Internal thread for metric bolts and rods.
- Suitable bolt length is 1-1,5 x the nominal size of the anchor + fixture thickness.
- Shallow drilling depth makes drilling and overhead installation easier.
- Suitable for sprinkler systems.
- ZP for dry indoor and temporary outdoor use.

## PRODUCT OVERVIEW

Other codes	SNRO 1308878 /
Material	Steel, zinc plated
Packages	box (bag): 5 / outer carton: 50 / piece: 1
Weight	11.3 kg / 1000
GTIN-13	6416031943126
Availability	end of life

## APPLICATIONS

- Suspension systems
- Pipelines
- Air ducts
- Sprinkler systems
- Cable trays
- Machines
- Consoles
- Ceiling bearers

## BASE MATERIALS

- APPROVED FOR
- Cracked concrete
  - Non-cracked concrete
- ALSO SUITABLE FOR
- Natural stone
  - Solid clay brick

## APPROVALS / CERTIFICATES



ETA-13/0441 + DoPs



1488-CPR-0350/Z



ETA-13/0442 + DoPs



1488-CPR-0443/W


## Technical data

### INSTALLATION DETAILS

### INSTALLATION DETAILS

Size  
Length (L)  
Thread (f)

M8	Drill hole diameter ( $d_0$ ) $\varnothing$	10
30	Minimum drill hole depth	32
13	Drill hole depth ( $h_1$ )	32
	Effective setting depth ( $H_{ef}$ )	30

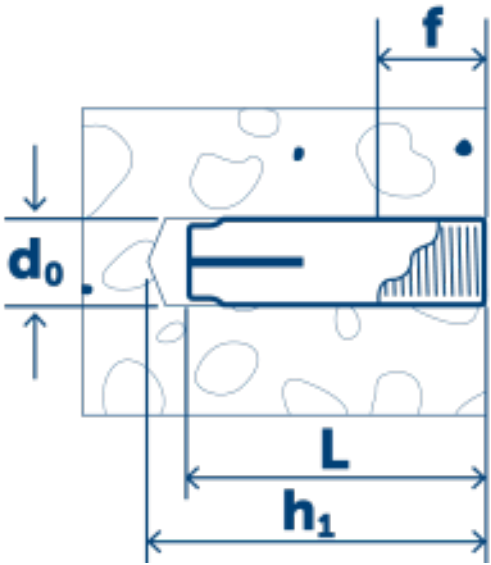

# Performance data

Base material	Load type	Load direction	Load value
Non-cracked concrete C20/25	$N_{Rec}$		3.6 kN
Non-cracked concrete C20/25	$V_{Rec}$		3.1 kN

# Installation

