

Drop in anchor LA+ 12 ZP (5 DIY)

SORMAT CODE 9640094316



ETA-approved drop in anchors ideal for suspension systems

- Drop in anchors for pre-installation with an installation tool.
- Internal thread for metric bolts and rods.
- Suitable bolt length is 1-1,5 x the nominal size of the anchor + fixture thickness.
- Shallow drilling depth makes drilling and overhead installation easier.
- Suitable for sprinkler systems.
- ZP for dry indoor and temporary outdoor use.

PRODUCT OVERVIEW

Other codes	SNRO 1308885 /
Material	Steel, zinc plated
Packages	box (bag): 5 / outer carton: 50 / piece: 1
Weight	44.0 kg / 1000
GTIN-13	6416031943164
Availability	end of life

APPLICATIONS

- Suspension systems
- Pipelines
- Air ducts
- Sprinkler systems
- Cable trays
- Machines
- Consoles
- Ceiling bearers

BASE MATERIALS

- APPROVED FOR
- Non-cracked concrete
- ALSO SUITABLE FOR
- Natural stone

APPROVALS / CERTIFICATES



ETA-13/0442 + DoPs



1488-CPR-0443/W


Technical data

INSTALLATION DETAILS

Size	12
Length (L)	50
Thread (f)	21

INSTALLATION DETAILS

Drill hole diameter (d ₀) ø	15
Minimum drill hole depth	54
Drill hole depth (h ₁)	54

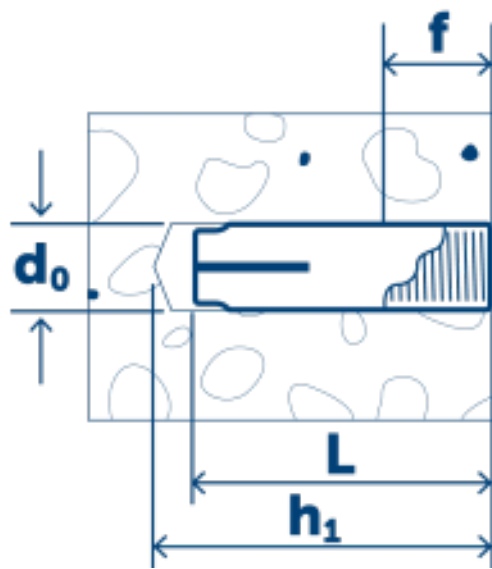

Effective setting depth (H_{ef})

50

Performance data

Base material	Load type	Load direction	Load value
Non-cracked concrete C20/25	N_{Rec}		6.3 kN
Non-cracked concrete C20/25	V_{Rec}		7.3 kN

Installation

