

# Drop in anchor LA+ 16 ZP (4 DIY)

SORMAT CODE 9640094318



## ETA-approved drop in anchors ideal for suspension systems

- Drop in anchors for pre-installation with an installation tool.
- Internal thread for metric bolts and rods.
- Suitable bolt length is 1-1,5 x the nominal size of the anchor + fixture thickness.
- Shallow drilling depth makes drilling and overhead installation easier.
- Suitable for sprinkler systems.
- ZP for dry indoor and temporary outdoor use.

## PRODUCT OVERVIEW

Other codes	SNRO 1308886 /
Material	Steel, zinc plated
Packages	box (bag): 4 / outer carton: 20 / piece: 1
Weight	103.6 kg / 1000
GTIN-13	6416031943188
Availability	end of life

## APPLICATIONS

- Suspension systems
- Pipelines
- Air ducts
- Sprinkler systems
- Cable trays
- Machines
- Consoles
- Ceiling bearers

## BASE MATERIALS

- APPROVED FOR
- Non-cracked concrete
- ALSO SUITABLE FOR
- Natural stone

## APPROVALS / CERTIFICATES



ETA-13/0442 + DoPs



1488-CPR-0443/W


## Technical data

### INSTALLATION DETAILS

Size	M16
Length (L)	65
Thread (f)	27

### INSTALLATION DETAILS

Drill hole diameter (d <sub>0</sub> ) ø	20
Minimum drill hole depth	70
Drill hole depth (h <sub>1</sub> )	70

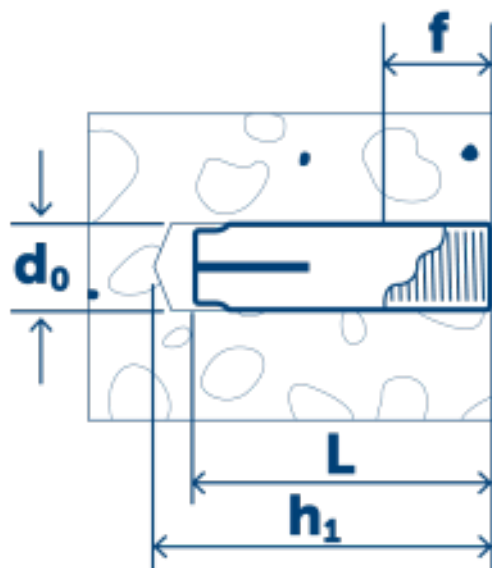

Effective setting depth ( $H_{ef}$ )

# Performance data

Base material	Load type	Load direction	Load value
All			
Non-cracked concrete C25/30	$N_{Rec}$		10.5 kN
Non-cracked concrete C20/25	$V_{Rec}$		12.2 kN

## Installation

