

Nail plug LIT 5/35 YZP (10 DIY)

SORMAT CODE 9640095100



For quick fixing of baseboards and covering strips in concrete and masonry

- Ready-to-install nylon plug for hammer-in -type through fixings.
- It is recommended to use a nylon hammer when installing.
- Nailscrew head with pozidrive slot for removing or adjusting the anchor.
- Head of the nailscrew covers the head of the plug which will be invisible to the eye.
- White and brown plugs available. Supplied with preassembled nails in various colours.
- ZP for dry indoor and temporary outdoor use.

APPLICATIONS

- Baseboards
- Covering strips

Technical data

INSTALLATION DETAILS

Length (L)
Max. fixture thickness (T_{fix})

35
5

PRODUCT OVERVIEW


Other codes	SNRO 1372085 /
Material	Polyamide / Steel, zinc plated
Packages	box (bag): 10 / outer carton: 100 / piece: 1
Weight	3.0 kg / 1000

BASE MATERIALS

- ALSO SUITABLE FOR
- Natural stone
 - Non-cracked concrete
 - Perforated clay brick
 - Solid clay brick

INSTALLATION DETAILS

Drill hole diameter (d ₀) Ø	5,0
Minimum drill hole depth	35
Drill hole depth (h ₁)	35
Total drilling depth	40
Nominal setting depth (H _{nom})	30

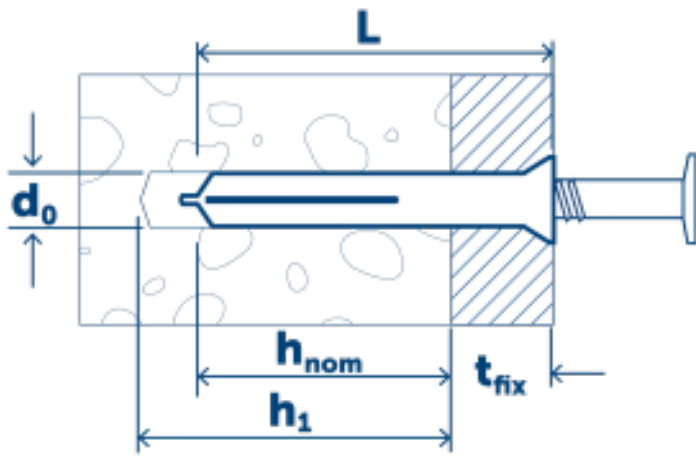

Installation

