

# Nail plug LIT 5/35 black (10 DIY)

SORMAT CODE 9640095106



## For quick fixing of baseboards and covering strips in concrete and masonry

- Ready-to-install nylon plug for hammer-in -type through fixings.
- It is recommended to use a nylon hammer when installing.
- Nailscrew head with pozidrive slot for removing or adjusting the anchor.
- Head of the nailscrew covers the head of the plug which will be invisible to the eye.
- White and brown plugs available. Supplied with preassembled nails in various colours.
- ZP for dry indoor and temporary outdoor use.

## APPLICATIONS

- Baseboards
- Covering strips

## Technical data

### INSTALLATION DETAILS

Length (L)	35	Drill hole diameter (d <sub>0</sub> ) ø	5,0
Max. fixture thickness (T <sub>fix</sub> )	5	Minimum drill hole depth	35
		Drill hole depth (h <sub>1</sub> )	35
		Total drilling depth	40
		Nominal setting depth (H <sub>nom</sub> )	30


## PRODUCT OVERVIEW

Other codes	SNRO 1372088 /
Material	Steel, zinc plated
Packages	box (bag): 10 / outer carton: 100 / piece: 1
Weight	3.0 kg / 1000

## BASE MATERIALS

- APPROVED FOR
- Cracked concrete
  - Non-cracked concrete
- ALSO SUITABLE FOR
- Hollow-core slab
  - Natural stone
  - Perforated clay brick
  - Solid clay brick

### INSTALLATION DETAILS

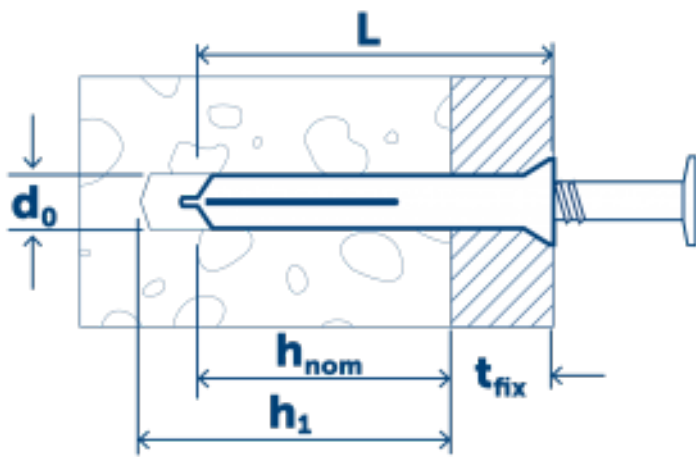

# Installation

