

Nail plug LIT 5/45 YZP (10 DIY)

SORMAT CODE 9640095110



For quick fixing of baseboards and covering strips in concrete and masonry

- Ready-to-install nylon plug for hammer-in -type through
- It is recommended to use a nylon hammer when installing.
- · Nailscrew head with pozidrive slot for removing or adjusting the anchor.
- Head of the nailscrew covers the head of the plug which will be invisible to the eye.
- White and brown plugs available. Supplied with preassembled nails in various colours.
- ZP for dry indoor and temporary outdoor use.

PRODUCT OVERVIEW

Other codes SNRO 1372089 / Material Polyamide / Steel, zinc plated

Packages box (bag): 10 / outer

carton: 100 / piece: 1

3.6 kg / 1000 Weight

APPLICATIONS

- Baseboards

Covering strips

Technical data

INSTALLATION DETAILS

Length (L) Max. fixture thickness (Tfix)

BASE MATERIALS

ALSO SUITABLE FOR


- Natural stone
- Non-cracked concrete
- · Perforated clay brick
- · Solid clay brick

45

15

INSTALLATION DETAILS

Drill hole diameter (d ₀) ø	5,0
Minimum drill hole depth	35
Drill hole depth (h ₁)	35
Total drilling depth	50
Nominal setting depth (H _{nom})	30

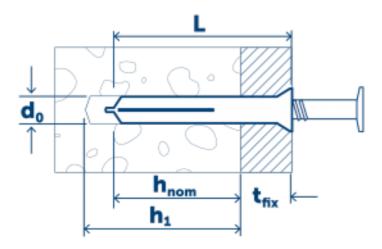

Installation

