

Concrete Screw S-CSA CS 5X75 ZP (10 DIY)

SORMAT CODE 9640095902



ETA-approved 6 concrete screw for cracked and non-cracked concrete

- Self-tapping screw anchors for push-through installations.
- Requires a small drill hole diameter. No prescribed tightening torque.
- No expansion forces allowing for small edge distances and spacings.
- Fully removable.
- ZP for dry indoor use.

APPLICATIONS

- Facade scaffoldings
- Temporary fixings
- Seatings
- Shelves
- Cable racks
- Handrails
- Battens

PRODUCT OVERVIEW

Other codes	/
Material	Steel, zinc plated
Packages	box (bag): 10 / outer carton: 100
Weight	11.1 kg / 1000

BASE MATERIALS

- ALSO SUITABLE FOR
- Hollow-core slab
 - Non-cracked concrete
 - Solid clay brick
 - Solid sand-lime brick

APPROVALS / CERTIFICATES



TC 5905-19


Technical data

INSTALLATION DETAILS

Size	5
Length (L)	75
Thread (f)	70
Drive	T25
Max. fixture thickness (T _{fix})	30

INSTALLATION DETAILS

Hole in fixture (D _f)	7
Drill hole diameter (d ₀) Ø	5
Minimum drill hole depth	55
Drill hole depth (h ₁)	55
Nominal setting depth (H _{nom})	45

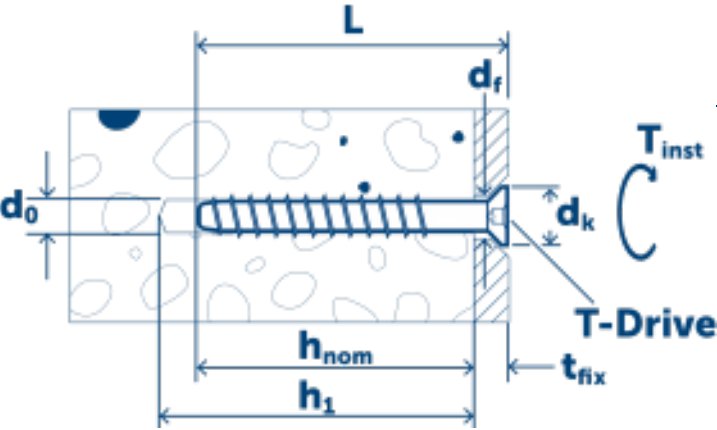

Installation torque (T_{inst})

12

HEAD DETAILS

Head diameter \varnothing

9,8

Performance data

Base material	ETA	Load type	Embedment depth (h _{nom})	Load direction	Load value
Non-cracked concrete C20/25	No	N _{Rec}	45 mm		1.7 kN
Non-cracked concrete C20/25	No	V _{Rec}	45 mm		1.7 kN

Installation

