

Concrete Screw S-CSA HEX 6x35/1 ML (10 DIY)

SORMAT CODE 9640095939



ETA-approved 6/8/10 concrete screw for cracked and non-cracked concrete

- Self-tapping, approved screw anchors for push-through installations.
- Requires a small drill hole diameter. No prescribed tightening torque.
- No expansion forces allowing for small edge distances and spacings.
- Fully removable.
- ML (Multi Layer) corrosion protection coating exceeding 1000 hours in SST acc. ISO 9227.
- For outdoor use in not safety relevant applications.

PRODUCT OVERVIEW

Other codes	/
Material	Multi Layer coated
Packages	box (bag): 10 / outer carton: 100
Weight	15.5 kg / 1000
GTIN-13	6416031959394

APPLICATIONS

- Facade scaffoldings
- Temporary fixings
- Seatings
- Shelves
- Cable racks
- Handrails
- Battens

BASE MATERIALS

- APPROVED FOR
- Cracked concrete
 - Hollow-core slab
 - Non-cracked concrete
- ALSO SUITABLE FOR
- Solid clay brick
 - Solid sand-lime brick

APPROVALS / CERTIFICATES



ETA-17/1009 + DoPs



Fire resistance (ETA-17/1009)




0809-CPR-1238

Technical data

INSTALLATION DETAILS

INSTALLATION DETAILS

Size	6	Hole in fixture (D_f)	9
Length (L)	36	Drill hole diameter (d_0) $\varnothing$	6
Width across flats (SW)	13	Minimum drill hole depth	45
Drive	T30	Drill hole depth (h_1)	45
Max. fixture thickness (T_{fix})	1	Nominal setting depth (H_{nom})	35
		Installation torque (T_{inst})	14

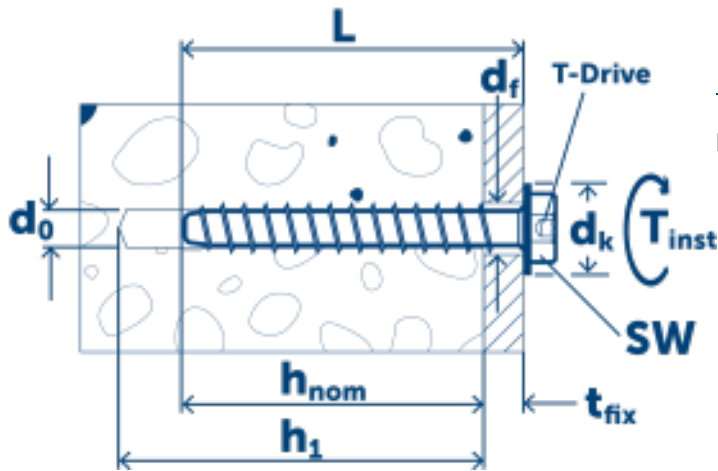

HEAD DETAILS

Head diameter $\varnothing$	16,5
-----------------------------	------

Performance data

Base material	Load type	Embedment depth (h _{nom})	Load direction	Load value
All				
Non-cracked concrete C20/25	N _{Rec}	35 mm		1.4 kN
Non-cracked concrete C20/25	V _{Rec}	35 mm		5.4 kN
Cracked concrete C20/25	N _{Rec}	35 mm		1.4 kN
Cracked concrete C20/25	V _{Rec}	35 mm		5.4 kN
Hollow-core slab, bottom flange thickness 25 mm	N _{Rec}	35 mm		1.2 kN
Hollow-core slab, bottom flange thickness 25 mm	V _{Rec}	35 mm		1.2 kN

Installation

