

Liebig Lightning Protection Anchor BLS M8-14/BS085 A4

SORMAT CODE 9650814085



Unique solution for retrofitting grounding systems

- Automatically self-undercutting, unique heavy duty anchor for push-through installations
- Connects retrofitted grounding systems to reinforcing bars in concrete structures.
- Liebig® Superplus Lightning Protection Anchor shares the characteristics and performance of the SUPERPLUS self-undercutting anchors.
- A4 for indoor, outdoor and industrial use.

APPLICATIONS


- Retrofitted grounding systems.

Technical data

INSTALLATION DETAILS

Size
Length (L)
Width across flats (SW)

M8
85
13

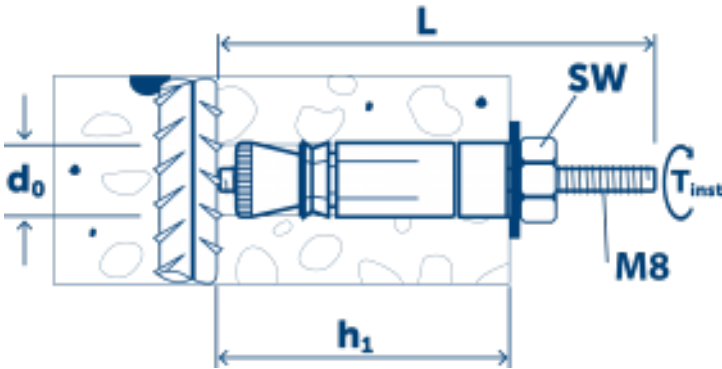

Installation

PRODUCT OVERVIEW

Other codes	/
Material	Stainless steel, A4
Packages	box (bag): 25 / outer carton: 125 / pallet: 7000
Weight	72.0 kg / 1000

BASE MATERIALS

- ALSO SUITABLE FOR
- Non-cracked concrete

INSTALLATION DETAILS

Drill hole diameter (d₀)	14
Minimum drill hole depth	40...60
Drill hole depth (h₁)	40...60
Installation torque (T_{inst})	25

