

# Through bolt S-KAK 6/15 HDG

SORMAT CODE 9640002102



## Premium-quality through bolts for fixing in non-cracked and cracked concrete

- Torque-controlled expansion anchors for pre-, push-through and distance installations.
- When torque is applied the expansion clip expands developing frictional grip with the drill hole walls.
- Anchor diameter and max. fixture thickness marked on the body.
- The use of S-KA setting tool makes serial installation safer and quicker.
- HDG for dry and humid indoor use, outdoor inland rural areas only.

## APPLICATIONS

- Steel structures
- Column base plates
- Seatings
- Barriers
- Cable racks
- Handrails
- Ladders
- Façade systems

## APPROVALS / CERTIFICATES



ETA-18/0971 + DoPs



0809-CPR-19004629



TC 6236-21



Fire resistance (ETA-18/0971)

## PRODUCT OVERVIEW

<b>Other codes</b>	SNRO 1356704 / LVI 3252905
<b>Material</b>	Steel, hot dip galvanized
<b>Packages</b>	box (bag): 100 / outer carton: 500 / pallet: 28000
<b>Weight</b>	14.9 kg / 1000

## BASE MATERIALS

### APPROVED FOR

- Cracked concrete
- Non-cracked concrete


### ALSO SUITABLE FOR

- Natural stone
- Solid clay brick

## Technical data

INSTALLATION DETAILS

- Size
- Length (L)
- Thread (f)
- Width across flats (SW)
- Max. fixture thickness (T<sub>fix</sub> )

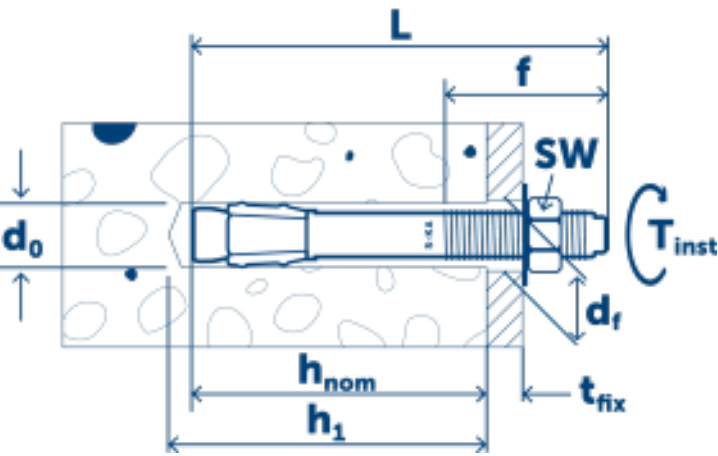

INSTALLATION DETAILS

M6	Hole in fixture (D <sub>f</sub> )	7
65	Drill hole diameter (d <sub>0</sub> ) ∅	6
38	Minimum drill hole depth	50
10	Drill hole depth (h <sub>1</sub> )	50
15	Nominal setting depth (H <sub>nom</sub> )	40
	Effective setting depth (H <sub>ef</sub> )	35
	Installation torque (T <sub>inst</sub> )	7

# Performance data

Base material	Load type	Embedment depth ( $h_{nom}$ )	Load direction	Load value
All				
Non-cracked concrete C20/25	$N_{Rec}$	40 mm		1.7 kN
Non-cracked concrete C20/25	$V_{Rec}$	40 mm		2.5 kN
Cracked concrete C20/25	$N_{Rec}$	40 mm		1.7 kN
Cracked concrete C20/25	$V_{Rec}$	40 mm		2.5 kN

## Installation

