

Brass anchor MSA 8

SORMAT CODE 9640072208



Quality all-around brass anchors with internal thread

- Internally threaded brass expansion anchor for preinstallation.
- Cross knurling on the body to prevent rotation during installation.
- Internal thread for metric bolts and rods.
- Brass anchors are suitable for indoor and outdoor use.

PRODUCT OVERVIEW

| Other codes |
|----------------------|
| Material Packages |
| Weight |


SNRO 1356188 / LVI 3252193 Brass box (bag): 100 / outer carton: 1000 / pallet: 56000 8.1 kg / 1000

APPLICATIONS

- Air ducts
- Cable trays
- Curtain rails
- Substructures
- Rails
- Protective wall panels
- Safety covers
- Suspended ceilings

Technical data

INSTALLATION DETAILS

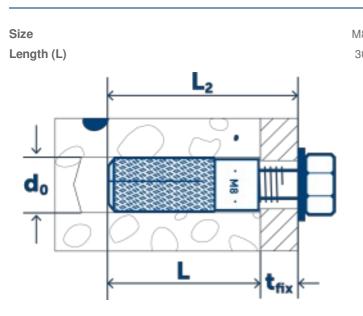

ALSO SUITABLE FOR

BASE MATERIALS

- Hollow-core slab
- Natural stone
- Non-cracked concrete
- Solid clay brick

INSTALLATION DETAILS

| 18 | Drill hole diameter (d ₀) Ø | 10 |
|----|---|----|
| 30 | Nominal setting depth (Hnom) | 30 |

Performance data

| Base material | Load type | Embedment depth (h _{nom}) | Load direction | Load value |
|-----------------------------|------------------|-------------------------------------|----------------|------------|
| Non-cracked concrete C20/25 | N _{Rec} | 30 mm | * | 1.5 kN |
| Non-cracked concrete C20/25 | V _{Rec} | 30 mm | Ĭ | 1.5 kN |

Installation

