

PFG Eyebolt type EBF 16 ZP

SORMAT CODE 9640077434



The original shield anchors with extra expansion for low-quality concrete

- Torque-controlled shield anchors for pre- and distance installations depending on the type.
- 4-way extra wide expansion for great performance also in lower quality base materials found in many old constructions.
- Good tolerance for variation in drill hole size.
- ZP for dry indoor and temporary outdoor use.

APPLICATIONS

- Steel structures
- Facade scaffolding
- Gates
- Facade systems
- Sun blinds
- Steel structures
- Pipe supports

Technical data

INSTALLATION DETAILS

Size
Length (L)
Width across flats (SW)

M16
100
24

INSTALLATION DETAILS

Drill hole diameter (d_0) \varnothing	25
Minimum drill hole depth	105
Drill hole depth (h_1)	105
Nominal setting depth (H_{nom})	100
Installation torque (T_{inst})	120

HEAD DETAILS


Inner hole / eye diameter \varnothing	23,0
---	------

PRODUCT OVERVIEW

Other codes	SNRO 1356266 /
Material	Steel, zinc plated
Packages	box (bag): 5 / outer carton: 25 / pallet: 1400
Weight	485.9 kg / 1000
GTIN-13	8716247774346
Availability	end of life

BASE MATERIALS

- ALSO SUITABLE FOR
- Natural stone
 - Non-cracked concrete

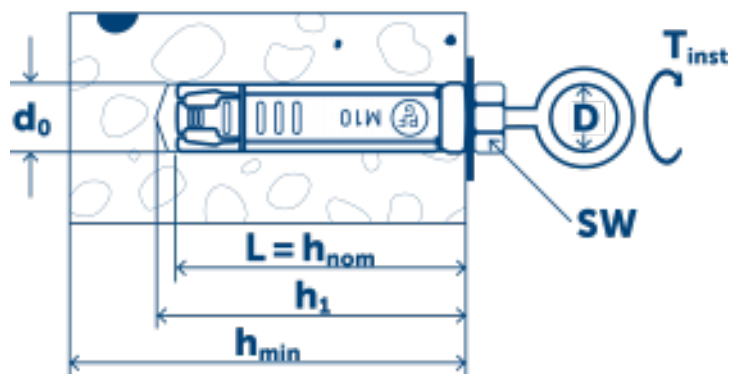

Performance data

Base material	Load type	Embedment depth (h_{nom})	Load direction	Load value
Non-cracked concrete C20/25	N_{Rec}	100 mm		9.9 kN

Installation

