

PFG Eyebolt type EBF 10 ZP (2 DIY)

SORMAT CODE 9640094594



The original shield anchors with extra expansion for lowquality concrete

- Torque-controlled shield anchors for pre- and distance installations depending on the type.
- 4-way extra wide expansion for great performance also in lower quality base materials found in many old constructions.
- Good tolerance for variation in drill hole size.
- ZP for dry indoor and temporary outdoor use.

PRODUCT OVERVIEW

Other codes SNRO 1372006 / Material Steel, zinc plated

Packages box (bag): 2 / outer carton: 10

/ piece: 1

 Weight
 121.3 kg / 1000

 GTIN-13
 6416031945946

 Availability
 end of life

APPLICATIONS

- · Steel structures
- · Facade scaffolding
- Gates
- · Facade systems
- Sun blinds
- Steel structures
- · Pipe supports

BASE MATERIALS

ALSO SUITABLE FOR

- Natural stone
- Non-cracked concrete

Technical data

INSTALLATION DETAILS

Size Length (L)


INSTALLATION DETAILS

M10	Drill hole diameter (d ₀) ø	16
60	Minimum drill hole depth	65
	Drill hole depth (h ₁)	65
	Nominal setting depth (H _{nom})	60
	Installation torque (Tinst)	50

HEAD DETAILS

Inner hole / eye diameter Ø

14,5

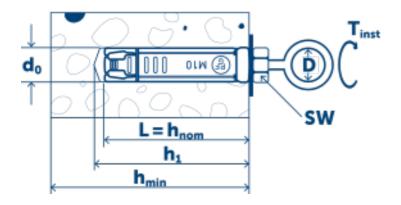

Performance data

Base material	Load type	Embedment depth (h _{nom})	Load direction	Load value
Non-cracked concrete C20/25	N _{Rec}	60 mm	*	4.8 kN

Installation

